

# INOVAR LOOSELAY

LUXURY RESILIENT VINYL TILES





## LOW INDOOR VOC

### **CERTIFIED LOW VOC**

INOVAR group recognises the environmental and commercial benefits of low VOC product. Low VOC not only reduces toxins that cause chemical and allergy sensitivities, but also reduces contaminant concentrations in the ozone and groundwater.



## FORMALDEHYDE

### **HEALTH PLUS**

With E1 formaldehyde emission, INOVAR resilience vinyl floor is excellent for use in buildings where it is desirable to maintain good indoor air quality by minimising the entrapment of gaseous pollutants.



## D.I.Y. REPLACEMENT

### **ANTI SLIP BACKING**

Each plank comes with anti-slip backing, making it easy to install and easy for replacement. Now everybody can DIY their own floors without much hassle. Your floors, your way and that's the way to go.



## MICRO CERAMIC

### **COMMERCIAL GRADE**

Beside 100% water and termite proof, the product comes with 0.55 mm scratch resistance wear layer enhanced with nano-sized microceramic glass beads and high density UV-cured polyurethane.

# WE ARE ECO

## LOOSELAY RESILIENT VINYL TILES

INOVAR Loose Lay resilient vinyl tiles are made up of more than 67% recyclable materials and recyclable after use.



# DESIGN GALLERY

## INOVAR LOOSELAY

Width : 228.6 mm  
Length : 1219.2 mm  
Thickness : 5 mm  
Wear layer : 0.55 mm



LW8245 Titanium



LW5376 Grey Steel



## PRODUCT WARRANTY

- 20 years residential\*
- 5 years commercial\*

*\* Terms & conditions apply.*




LW5343 Vintage Oak

LW5343 Vintage Oak





LW8245 Titanium

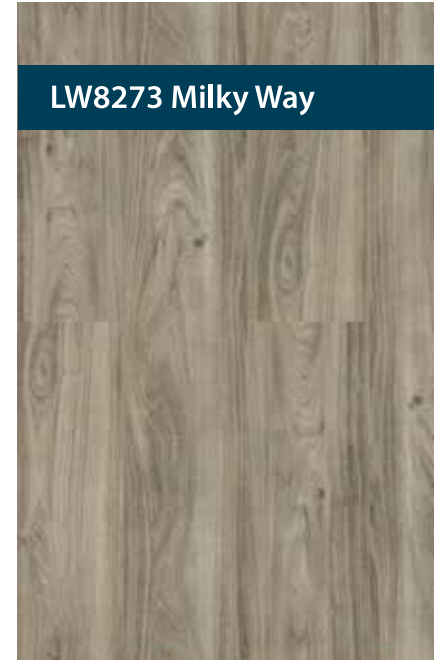

LW8273 Milky Way



LW7236 Spotted Gum



LW7236 Spotted Gum



LW3963 Cosmic



LW3963 Cosmic




LW5375 Dark Oak



LW5375 Dark Oak

# PRODUCT FEATURES

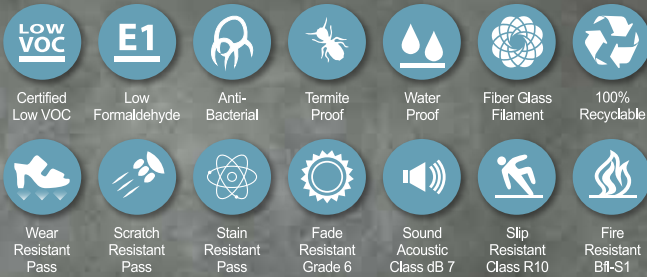

# PRODUCT SPECIFICATIONS

ITEMS	Europe Standard	
	Standard	Result
Composition	EN649, EN14041	Pass
	70% Post-Consumer Recycled Content, 100% Recyclable After Use	
Wear layer Composition	Virgin PVC w/ Microceramic Beads & 2 Coats UV-Cured PUR w/Nano-Silver	
Wear layer	EN429	0.55mm
Abrasion Resistance	EN660-2	Wear Group P
Quality Control Mgmt	ISO 9001 : 2000	
Environment Mgmt	ISO 14001 : 2004	
Gauge	EN 428	5.0mm
Weights & Measurement	Carton Weight (kg)	Dimension (mm)
Planks	23.42	1219.2 x 228.6
Contents / Weight	Pieces / Ctn (pcs)	Coverage / Ctn (m2)
Planks	8	2.23
Squareness	EN 427	Pass
Fire	EN13501-1	Bfl - S1
Smoke	ONORM B3800	Q1
Residual Indentation	EN433	≤ 0.08mm
Hardness - Durometer	Shore A	90 ± 5
Dimensional Stability	EN 434	Pass
Slip Resistance	DIN 51130 (Australia)	R10 [HIGH*]
Colour Fastness	ISO 105-B02	≥ Grade 6
Radiant Heat Suitability	Up To 28°C	
Chair Castor Resistance	Excellent	
VOC Emissions	EN 717-1	Pass
Chemical Resistance	Excellent - Consult Chemical Reagent Testing Chart for Reference	



## INOVAR FLOOR AUSTRALIA

2, Wella Way, Somersby,  
NSW 2250, Australia.  
Tel : 1300 900 501  
Fax : 1300 900 502  
Email : sales@inovarfloor.com.au

www.inovarfloor.com.au

Australia • Cambodia • India • Indonesia • Japan • Malaysia • Singapore • Taiwan • Thailand • Vietnam